

S-MOUNT Enclosure

Digital Partyline Solutions

Linking
People
Together



S-MOUNT with HKB-2X*

Key Features and Benefits

- Flexible mount for HKB-2X
- Desktop with multiple angles
- Portable and semi-permanent installations
- Various connectivity options

HelixNet is a fully networked partyline intercom, supporting up to 24 channels and independent program audio over XLR, LAN or WAN.

Description

HelixNet's S-MOUNT is a desktop or surface mounting kit for the HKB-2X with adjustable angles for a wide variety of deployment.

Universal Mount

Intended for portable and semi-permanent installations, the S-MOUNT features raised sides to protect the knobs of the HKB-2X speaker station from damage. Mounted speaker stations can be carried face-to-face if needed due to keyed lugs for easy stacking. Anti-slip feet help prevent movement when using the S-MOUNT on a desktop. For temporary setups, the screw holes provided on the S-MOUNT allow simple and quick surface mounting.

The S-MOUNT breaks the HKB-2X's connections to XLR-3M/F loop-through and RJ45 LAN connector for connectivity to the HMS-4X main station over XLR Powerline or Ethernet, while providing ability to power the unit from Powerline, Power-over-Ethernet (PoE) or a DC input using the supplied power supply.

Technical Specifications

Connectors

XLR Powerline: (2) Powerline, each with 3-pin XLR-M/F

DC Power: 3-pin to AC adapter (provided)

Ethernet/PoE: RJ45

PSU: 3-pin

Main Power

Via AC Adapter: AC Adapter Power

Connector: IEC60320-1-C14

Via Power-over-Ethernet (PoE)

Connector: RJ45

Environmental

32° - +104°F (0° - +40°C)

90% relative humidity

Dimensions

Minimum (Closed):

3.9 x 10.4 x 6.7 in (HxWxD)

(99 x 265 x 170 mm)

Maximum (Open):


6.9 x 10.4 x 6.7 in (HxWxD)

(175 x 265 x 170 mm)


Weight

2.8 lbs (1.2 kg)


S-MOUNT Views (HKB-2X sold separately)

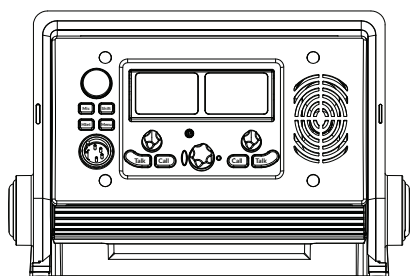

Front View

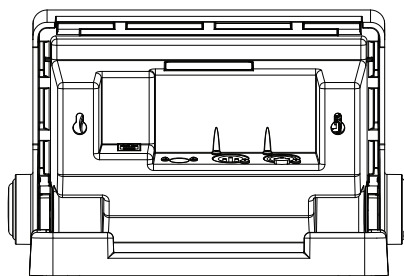


Rear View

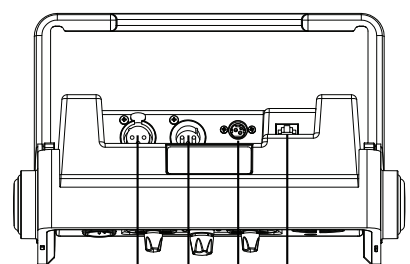

Top View

1 2 3 4



Side View

5

Legend

Front

1. 3-pin XLR-F connector
2. 3-pin XLR-M connector
3. Power connector (AC/DC power only)
4. Ethernet connector
5. Angle adjust button (both sides)

Order Code

S-MOUNT (includes): (4) 6/32 x 1/2" mounting screws (280038Z), (4) rubber feet (416G054), and (1) wall adapter PSU 15W 48V DC (453G025)

Optional Accessories (sold separately):
Inline PSU 15W 48V DC (453G026)