


**USER MANUAL**  
ENGLISH - VERSION 226

# perseo



**AYRTON**  
Digital Lighting

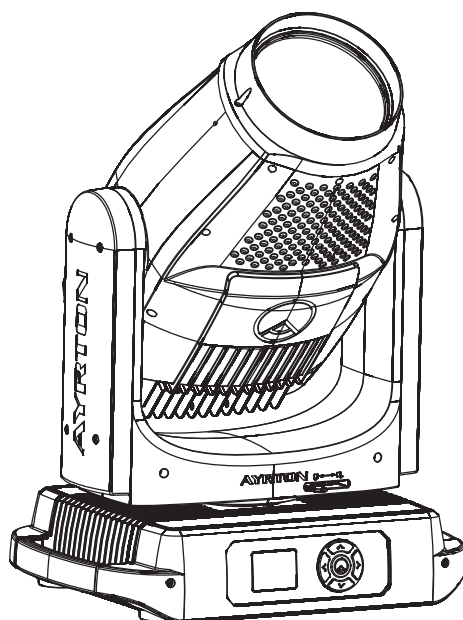

2 Rue de Vitruve,  
91140 Villebon-sur-Yvette,  
France

## CONTENTS

|                                                                     |    |
|---------------------------------------------------------------------|----|
| 1. SAFETY INSTRUCTIONS .....                                        | 3  |
| 2. FEATURES .....                                                   | 4  |
| 3. FIXTURE OVERVIEW .....                                           | 4  |
| 4. DRAWINGS .....                                                   | 4  |
| 5. INSTALLATION INSTRUCTIONS .....                                  | 6  |
| 6. DMX-512 CONTROL CONNECTION .....                                 | 6  |
| 7. DMX-512 CONNECTION WITH DMX TERMINATOR .....                     | 7  |
| 8. DEVICE DMX START ADDRESS SELECTION .....                         | 7  |
| 9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM ..... | 7  |
| 10. DISPLAY .....                                                   | 7  |
| 11. DMX PROTOCOL .....                                              | 11 |
| 12. ERROR MESSAGES .....                                            | 11 |
| 13. CLEANING AND MAINTENANCE .....                                  | 13 |

Keep this manual for future needs.

Errors and omissions for all information given in this user manual are possible.  
All information is subject to change without prior notice.



**RoHS**

## 1. SAFETY INSTRUCTIONS

### 1.1 > IMPORTANT SAFETY WARNINGS

This device has left the factory in perfect condition. In order to maintain this condition and to ensure safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.

In order to install, operate and maintain the lighting fixture safely and correctly we suggest that the installation and operation be carried out by qualified technicians and these instructions be carefully followed.

| CAUTION                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | High voltage. Risk of severe or fatal electric shock.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|    | Always disconnect mains supply before removing any fixture covers.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|    | Never look directly into the light source. Sensitive persons may suffer an epileptic shock.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|    | Fixture exposed to salt water should not be stored in its foam insert without being cleaned with fresh water first. It is best practice that fixture be stored dry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|    | Never touch the device during operation. covers may be hot.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|    | Blue light hazard: risk group 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|  | <p><b>Warning:</b> Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p><b>Note:</b> This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p> |
|                                                                                    | CAN ICES-3 (A)/NMB-3(A)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Damage caused by the disregard of this user manual is not subject to warranty. The dealer and manufacturer will not accept liability for any resulting defects or problems.

- If the device has been exposed to temperature changes due to environmental conditions, do not power on immediately. The resulting condensation could damage the device. Leave the device powered off until it has reached room temperature.

- Ensure the sealing rubber covers of powerCON TrueOne and XLR connectors are fitted properly when the device is not in use, to avoid water ingress.
- This device falls under protection-class I. Therefore, it is essential that the device be earthed.
- If either lenses or display are damaged (damage may include cracks or gashes in the material) they must be replaced.
- Electrical connections, such as replacing the power plug, must be performed by a qualified person.
- Make sure that the available voltage is not higher than that which is stated in this manual.
- Make sure the power cord is never crushed or damaged by sharp edges. If this should be the case, replacement of the cable must be done by an authorized dealer.
- If the external flexible power cord of this device is damaged, it shall be exclusively replaced by the manufacturer or their service agent or a similar qualified person in order to avoid injury.
- When the device is not in use or before performing maintenance, always disconnect the device from the mains. Only handle the power cord from the plug. Never pull the plug out of a socket by tugging the power cord.
- When powered on for the first time, some smoke or smell may occur. This is caused by coating on metal parts when heated and is normal. If you are concerned, please contact your distributor.
- Do not focus the beam onto flammable surfaces. The minimum distance between the exiting lens of the device and the illuminated surface must be greater than 2 meters.

#### CAUTION

Please be aware that damage caused by any modifications to the device are not subject to warranty. Keep away from children and non-professionals.

### 1.2 > GENERAL GUIDELINES

- This device is a lighting effect for professional use on stages, in discotheques, theatres, etc. The device was designed for indoor and outdoor use.
- This fixture is only allowed to be operated within the maximum alternating current as stated in the technical specifications in section 2 of this manual.
- Handle the device with care avoid shaking or using force when installing or maintaining the device.
- If you use the quick lock cam when rigging the device, make sure the quick lock fasteners are located in the quick lock holes correctly and securely.
- Operate the device only after having familiarized yourself with its functions. Do not permit operation by persons not qualified for operating the device. Most damage is the result of unprofessional operation.
- Please use the original packaging if the device is to be transported.
- The applicable temperature for the device is between -20°C to 45°C. Do not use the device outside of this temperature range.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 9.8 m is not expected.
- Suitable for theaters, studios, and similar locations.
- The installation must only be carried out by a qualified person.
- Indicate the luminaire shall be fixed install and not for portable use.

#### CAUTION

For safety reasons, please be aware that all modifications to the device are forbidden. If this device is operated in any way different to the ones described in this manual, the product may suffer damage and the warranty becomes void. Furthermore, any other operation may lead to short-circuits, burns, electric shocks, etc...

## 2. FEATURES

### POWER SUPPLY

- AC100-240 V~, 50/60 Hz
- Power Consumption: 800 W

### OPTICS

- Beam aperture: 7° to 58°
- 148 mm frontal lens

### LIGHT SOURCE

- 500 W LED white light engine
- Colour temperature output:
  - Perseo Profile S: 6900 K
  - Perseo Profile TC: 6500 K
- CRI:
  - Perseo Profile S: > 70
  - Perseo Profile TC: > 90

### MOVEMENT

- Extremely accurate positioning
- Moving-head operated via either 8- or 16-bit resolution
- High-resolution stepper motors operated via microprocessors to ensure extreme accuracy and smooth movement
- Pan and tilt automatic repositioning
- Moving head range: 540° (pan), 263° (tilt)

### COLOURS

- Sophisticated CMY Colour mixing
- Variable CTO
- Static colour wheel with 6 complimentary colours

### GOBOS

- Rotating gobo wheel: 7 interchangeable, rotating and indexable, gobo+open
- "Slot in & out" gobo wheel system
- Static gobo wheel: 11 + open, with different speed gobo shaking and gobo indexing

### FRAMING SYSTEM

- 4 individually shutter blades
- Rotation of the module: +/- 90°

### IRIS DIAPHRAGM

- 15-blade iris diaphragm
- Range: 15% to 100% open

### FROST

- 2 frost filters: one light, one heavy

### PRISMS

- 2 combinable rotating and indexable prisms
- One 5-facet circular, one 4-facet linear

### EFFECTS

- Focusable graphic animation effect-wheel
- Continuous rotation in both directions

### DIMMER / STROBE

- Electronic dimmer from 0 to 100%
- Strobe effect: 1 to 25 flashes per second

### HARDWARE FEATURES

- Graphic LCD display with flip function
- 5 menu buttons to set functions
- Integrated wireless LumenRadio™ receiver
- IP65 XLR 5 pin connectors
- IP65 RJ45 connectors
- IP65 powerCON TRUE1 TOP connectors

### CONTROL

- DMX 512 protocol
- DMX-RDM compatible

- Wireless DMX
- Stand-alone mode, local control panel
- ArtNet™ & sACN protocol
- Choice of 4 DMX modes (from 38 to 61 DMX channels)

### COOLING SYSTEM

- Advanced liquid cooling system
- Selectable ventilation user modes
- Excess temperature protection

### HOUSING

- Skeleton made of aluminium
- Base in die-cast aluminium
- Heatsinks in aluminium and copper
- Moulded covers ABS PC (VO class)
- 2-side handles for transportation
- 4 heavy-duty feet
- IP65 protection rating (IP66 optional)

### INSTALLATION

- 2 Omega ¼ turn brackets
- 4 ¼ turn mounting points
- Safety cable attachment point

### OPERATING PARAMETERS

- Maximum permitted: 45° C (113°F)
- Minimum permitted: -20° C (-4°F)
- Minimum usage distance: 2 m (6.56 ft)

### COMPLIANCE

- CE, UKCA, ETL


### SIZE

- Product: 490 x 710 x 330 mm (l x h x d)
- Foam: 655 x 590 x 555 mm (l x h x d)

### WEIGHT

- Product: 38.8 kg


## 3. FIXTURE OVERVIEW

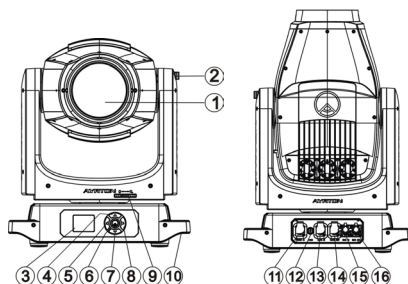


- |                  |                 |              |
|------------------|-----------------|--------------|
| 1. Front Lens    | 7. Down-button  | 13. RJ45 In  |
| 2. Tilt Lock     | 8. Right-button | 14. RJ45 Out |
| 3. Display       | 9. Pan Lock     | 15. DMX In   |
| 4. Up-button     | 10. Handle      | 16. DMX Out  |
| 5. Left-button   | 11. Power In    |              |
| 6. Center-button | 12. Fuse        |              |

## 4. DRAWINGS

### 4.1 › FIXTURE DIMENSION

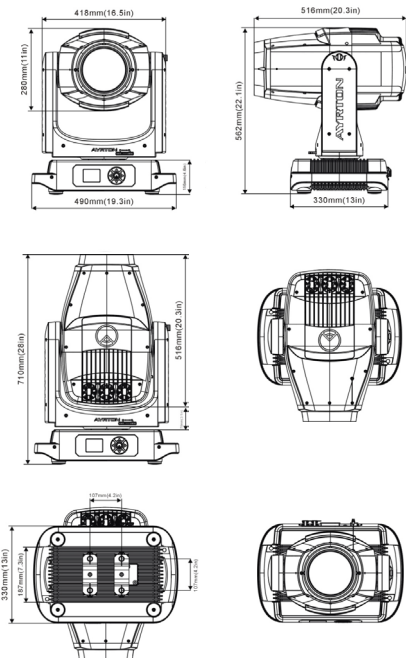

## 4.2 › COLOUR WHEEL

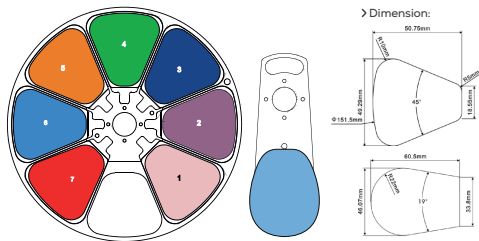


## COLOUR WHEEL

|   |                 |                |
|---|-----------------|----------------|
| 1 | Minus Green 1/2 | GP603050330010 |
| 2 | Magenta         | GP603050330020 |
| 3 | Congo Blue      | GP603050330030 |
| 4 | Green           | GP603050330040 |
| 5 | Orange          | GP603050330050 |
| 6 | Blue            | GP603050330060 |
| 7 | Red             | GP603050330590 |

Additional 1 dichroic filter

|   |         |
|---|---------|
| 1 | CTB 1/4 |
|---|---------|

### 4.3 › ROTATING GOBO WHEEL

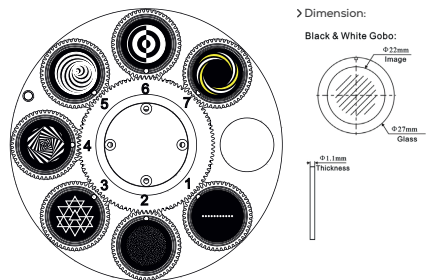


**GOBO WHEEL**

### Rotating Gobo

|   |      |                      |               |
|---|------|----------------------|---------------|
| 1 | 130  | Dot Line 11          | GP60303011206 |
| 2 | 074  | Star Dust            | GP60303011209 |
| 3 | 018  | Nested Triangle      | GP60303011208 |
| 4 | 039  | Infinite Stairs      | GP60303011211 |
| 5 | 134  | Vortex               | GP60303011207 |
| 6 | 067  | Black & White Target | GP60303011210 |
| 7 | 112Y | Nested Rings Yellow  | GP60303060064 |

#### 4.4 › STATIC GOBO WHEEL

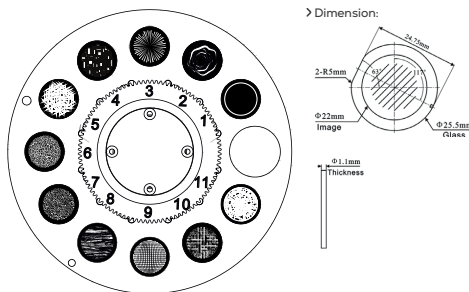


**GOBO WHEEL**

### Static Gobo

|   |     |                       |                |
|---|-----|-----------------------|----------------|
| 1 | 410 | Conical Tunnel Effect | GP60303011393A |
| 2 | 049 | Smoke Rings           | GP60303011394A |
| 3 | 047 | Fireworks             | GP60303011395A |
| 4 | 066 | Abstract Square       | GP60303011396A |
| 5 | 081 | Iron Filings          | GP60303011397A |
| 6 | 041 | Lost In The Brain     | GP60303011398A |

|    |     |               |                |
|----|-----|---------------|----------------|
| 7  | 101 | Deep Forest   | GP60303011399A |
| 8  | 105 | Tree Bark     | GP60303011400A |
| 9  | 190 | Mirror Ball   | GP60303011401A |
| 10 | 211 | Digital       | GP60303011402A |
| 11 | 242 | Stained Glass | GP60303011403A |

#### 4.4 > ANIMATION WHEEL

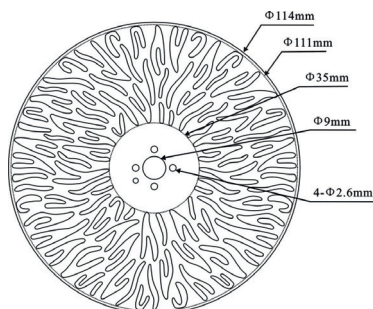

### 5. INSTALLATION INSTRUCTIONS

#### 5.1 > RIGGING THE DEVICE

##### CAUTION

Please consider the respective national norms during the installation. The installation must only be carried out by a qualified person.

- The applicable temperature for the lighting is between -20°C to 45°C. Do not use the lighting under or above the temperature range.
- The installation of the support structure has to be built and constructed in a way that it can hold 10 times the weight for 1 hour without any harming deformation.
- The installation must always be secured with a secondary safety attachment, e.g. an appropriate safety rope.
- Never stand directly below the device when mounting, removing or servicing the fixture.
- The operator has to make sure the safety relating and machine technical installations are approved by an expert before taking the device into operation for the first time.
- These installations have to be approved by a skilled person once a year.
- Overhead mounting requires extensive experience, including amongst others calculating working load limits, installation material being used, and periodic safety inspection of all installation material and the device. If you lack these qualifications, do not attempt the installation yourself. Improper installation can result in bodily injury.

#### 5.2 > RIGGING USING THE OMEGA BRACKETS


##### CAUTION

This step is very important to ensure safe rigging of the fixture.

- Fix the clamp to the bracket by tightening the M12 nut and bolt to the bracket through the Φ13 hole in the middle of the bracket.
- Insert the quick lock fasteners of the first Omega holder into the respective holes on the bottom of the device. Tighten the quick lock fasteners fully clockwise.
- Install the second Omega holder.
- Pull the safety cable through the holes on the bottom of the base

and over the trussing system or another suitable rigging point. Insert the end into the carabiner and tighten the safety screw.

- Do NOT attach the safety cable to the holes marked «X» on the drawing.
- For fixture of later productions, the safety cable can be attached to either the handle of the base or the hole on the bottom of the base (as shown below):

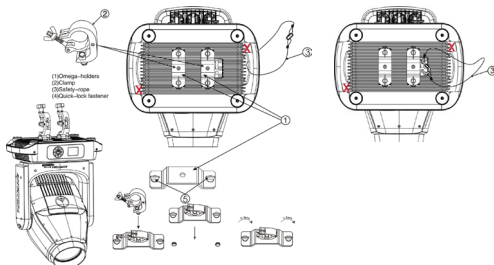


1. Omega bracket
2. Clamp
3. Safety rope
4. Quick-lock fastener

#### 5.3 > RIGGING DRAWINGS

##### CAUTION


Overhead rigging requires extensive experience, including (but not limited to) calculating working load limits, specifying installation/rigging materials, and periodic safety inspection of all installation material as well as the device. If you lack these qualifications, do not attempt the rigging of this device yourself. Improper installation/rigging can result in serious bodily injury.




- Be sure this fixture is kept at least 0.2 m away from any flammable materials (decoration etc.).
- Always use and install a supplied safety cable as a safety measure to prevent accidental damage and/or injury in the event the clamp fails.

### 6. DMX-512 CONTROL CONNECTION

Connect the provided male side of the XLR cable to the female XLR output of your controller and the female side of the XLR cable to the male XLR input of the device. You can connect multiple devices together in a serial fashion. The cable needed should be two core screened cable with XLR input and output connectors. Please refer to the diagram below.






## 7. DMX-512 CONNECTION WITH DMX TERMINATION

For installations where the DMX cable has to run over a long distance or is in an electrically noisy environment, such as in a discotheque, it is recommended to use a DMX terminator. This helps in preventing corruption of the digital control signal caused by electrical noise. The DMX terminator is an XLR plug with a 120  $\Omega$  resistor connected between pins 2 and 3, which is then plugged into the output (female) XLR socket of the last fixture in the chain.

Please see illustrations below.



## 8. DEVICE DMX START ADDRESS SELECTION

All fixtures should be given a DMX starting address when using a DMX signal, so that the correct fixture responds to the correct control signals. This digital starting address is the channel number from which the fixture starts to "listen" to the digital control information sent out from the DMX controller. The allocation of this starting address is achieved by setting the correct address number on the display located on the base of the device.

You can set the same starting address for all fixtures or a group of fixtures, or set different addresses for each fixture individually.

If you set the same address on all devices, all the devices will start to "listen" to the same control signal from the same channel number. In other words, changing the settings of one channel will affect all the fixtures simultaneously.

If you set a different address, each unit will start to "listen" to the channel number you have set, based on the quantity of control channels of the unit. That means changing the settings of one channel will affect only the selected device.

In the case of the LED moving head, in 40 channel modes, you should set the starting address of the first unit to 1, the second unit to 41 (40 + 1), the third unit to 81 (40 + 41), and so on.

## 9. OPERATING INSTRUCTIONS OF THE INTERNAL DMX WIRELESS SYSTEM

### 9.1 › EQUIPMENTS

This product is equipped with a Lumen radio Timo DMX receiver

### 9.2 › MESSAGE FROM THE LED INDICATOR

- Solid Green: Logged on to a transmitter and actively receiving DMX data.
- Solid Red: Not logged on to any transmitter (available) or not receiving DMX data.

### 9.3 › WDMX IN THE MENU OF THE FIXTURE

In the sub menu Wireless DMX, you'll find the option "Rest WDMX." Selecting this will disconnect the fixture from its current transmitter.

### 9.4 › SET UP THE WIRELESS SYSTEM

To connect the fixture to a transmitter, the transmitter must be in pairing mode.

You can activate this mode by selecting "Rest WDMX" from the fixture's menu or by performing a factory reset on the fixture.

Once the transmitter is ready, press its pairing button to link the devices.

#### Important Notes:

- After each job, please log out all receivers from the transmitter. This ensures the receivers return to an unassigned state and are ready for future pairings.
- Do not connect a fixture that is wirelessly linked to a transmitter to a DMX controller via cable. Doing so may cause signal interference.

## 10. DISPLAY

- The Display offers several features: you can set the starting address run the pre-programmed program or reset the device.
- The main menu is accessed by double clicking button until the display starts flashing.
- Browse through the menu by pressing , , or button.
- Press for 2 seconds in order to exit menu, double click for confirm. After accessing the edit mode, the unit will automatically exit to the main menu after 15 seconds from the last button press.
- When the unit is powered on if no data signal is connected after 1 minute then the display will switch off automatically.

## DEFAULT SETTINGS SHADED - V226

| Address         |                                                                                                                                                              |                                                                                                                                                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Address         | DMX address: 001-XXX<br>Decimal Universe: XXXXX<br>Net: XX<br>Sub-Net: X<br>Universe: X<br>Signal: <b>DMX</b> /WDMX/Art-Net/sACN                             | DMX Address                                                                                                                                                                                                                            |
| Mode            |                                                                                                                                                              |                                                                                                                                                                                                                                        |
| User Mode       | Stand Mode<br>Basic Mode<br><b>Extend Mode</b><br>Ghibli Mode<br>User Mode A<br>User Mode B<br>User Mode C                                                   | User's mode to change channel numbers                                                                                                                                                                                                  |
| Edit User ModeA | Max channel<br>PAN<br>:                                                                                                                                      | Preset User modes<br>A, B, C                                                                                                                                                                                                           |
| Options         |                                                                                                                                                              |                                                                                                                                                                                                                                        |
| Status          | No DMX Mode<br>Sun Protection<br>Pan Reverse<br>Tilt Reverse<br>Pan Degree<br>Feedback<br>Init PAN<br>Init TILT<br>Prerig INIT<br>Reset Mode<br>Pan/Tilt Spd | Close/Hold/Auto<br><b>ON</b> /OFF<br>ON/ <b>OFF</b><br>ON/ <b>OFF</b><br>630/ <b>340</b><br><b>ON</b> /OFF<br><b>ON</b> /OFF<br><b>ON</b> /OFF<br>ON/ <b>OFF</b><br><b>Fast</b> /All Rot Gobos<br><b>Fast</b> /Medium/Slow/<br>FS Mode |

| Options         |                      |                                                                                                                          |                                                                         |
|-----------------|----------------------|--------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Status          | Hibernation          | OFF/O1M-99M                                                                                                              | Stand by Mode                                                           |
|                 | DMX Output           | ON/OFF                                                                                                                   | DMX Output                                                              |
| Service PIN     | Service PIN          | Password = XXX                                                                                                           | Service Password="050"                                                  |
|                 | RDM UID              | xxx.xxx.xxx.xxx                                                                                                          | RDM UID                                                                 |
|                 | Set IP               | xxx.xxx.xxx.xxx                                                                                                          | Set IP                                                                  |
|                 | Set Mask IP          | xxx.xxx.xxx.xxx                                                                                                          | Set Mask IP                                                             |
|                 | DHCP                 | ON/OFF                                                                                                                   | DHCP                                                                    |
|                 | Cross Load SW        | ON/OFF                                                                                                                   | Cross Load SW                                                           |
|                 | Clr Error Info       | ON/OFF                                                                                                                   | Clr LED Timer                                                           |
|                 |                      |                                                                                                                          |                                                                         |
| Fans Control    | Fans Speed           | Auto<br>Stage<br>Silence<br>Super Silence                                                                                | Fans Speed select                                                       |
|                 | Constant Fans        | ON/OFF                                                                                                                   | Constant Fans                                                           |
| Disp.Setting    | Shutoff Time         | 02-60m 05m                                                                                                               | Display shutoff time                                                    |
|                 | Flip Display         | ON/OFF                                                                                                                   | Reverse 180 degree                                                      |
|                 | Key Lock             | ON/OFF                                                                                                                   | Key Lock                                                                |
|                 | DispFlash            | ON/OFF                                                                                                                   | DispFlash                                                               |
| Temp. C/F       | Celsius              |                                                                                                                          | Temperature switch                                                      |
|                 | Fahrenheit           |                                                                                                                          | between °C / °F                                                         |
| Initial Pos.    | PAN =XXX             |                                                                                                                          | Initial effect position                                                 |
| Wireless DMX    | Activate WDMX        |                                                                                                                          | Activate WDMX                                                           |
|                 | Act&Data Out         |                                                                                                                          | Act&Data Out                                                            |
| Dim Curve       | Rest WDMX            |                                                                                                                          | Rest WDMX                                                               |
|                 | Square Law           |                                                                                                                          |                                                                         |
|                 | Linear<br>Linear Low |                                                                                                                          |                                                                         |
| Refresh Select  | 12K                  |                                                                                                                          | Refresh Select                                                          |
|                 | 2.4K                 |                                                                                                                          |                                                                         |
|                 | 16K                  |                                                                                                                          |                                                                         |
|                 | 25K                  |                                                                                                                          |                                                                         |
| Gobo Correction | ON/OFF               |                                                                                                                          | Gobo Correction                                                         |
| Head Heater     | ON/OFF               |                                                                                                                          | Head Heater                                                             |
| Trigger         | DMX Value Disp.      | PAN....                                                                                                                  | DMX Value Disp.                                                         |
|                 | Set to Follower      | Follower 1, Follower 2,<br>Follower 3<br>Leader/Alone                                                                    | Set to Follower                                                         |
|                 | Auto Program         |                                                                                                                          | Auto Program                                                            |
| Reset Default   | ON/OFF               |                                                                                                                          | Restore factory set.                                                    |
| Reset Options   | ON/OFF               |                                                                                                                          | Reset Options                                                           |
| Reset User Set  | Address              | DMX address: 001-XXX<br>Decimal Universe: XXXXX<br>Net: XX<br>Sub-Net: X<br>Universe: X<br>Signal: DMX/WDMX/Art-Net/sACN | DMX Address<br>Decimal Universe<br>Net<br>Sub-Net<br>Universe<br>Signal |
|                 | Mode                 | Extend Mode<br>Stand Mode<br>Rivale Mode                                                                                 | User's mode<br>to change<br>channel numbers                             |
|                 | Fans Speed           | Auto<br>Stage<br>Silence<br>Super Silence                                                                                | Fans Speed select                                                       |
|                 | Constant Fans        | ON/OFF                                                                                                                   | Constant Fans                                                           |

| Info         |                        |                                                                                                                               |                                                                       |
|--------------|------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Time Info.   | Current Time           | XXXX(Hours)                                                                                                                   |                                                                       |
|              | Ttl Life Hrs           | XXXX(Hours)                                                                                                                   |                                                                       |
|              | Last Run Hrs           | XXXX(Hours)                                                                                                                   |                                                                       |
|              | LED Hours              | XXXX(Hours)                                                                                                                   |                                                                       |
|              | Timer PIN              | Password = XXX                                                                                                                |                                                                       |
|              | Clr Last Run           | ON/OFF                                                                                                                        |                                                                       |
| Temp. Info   | XXX°C/°F               | Head Temp.                                                                                                                    |                                                                       |
| Humidity     | x%                     | Humidity                                                                                                                      |                                                                       |
| Fan Info.    | xxxx RPM               | Fan information                                                                                                               |                                                                       |
| Software Ver | V1.0__                 | Software version                                                                                                              |                                                                       |
| Network      | IP, Mask, Mac          | Network                                                                                                                       |                                                                       |
| Error Info.  | Error Record 1         | Error Info.                                                                                                                   |                                                                       |
|              | :                      |                                                                                                                               |                                                                       |
| Test         |                        |                                                                                                                               |                                                                       |
| Home         | All                    | All                                                                                                                           |                                                                       |
|              | Pan&Tilt               | Pan&Tilt                                                                                                                      |                                                                       |
|              | Colour                 | Colour                                                                                                                        |                                                                       |
|              | Gobo                   | Gobo                                                                                                                          |                                                                       |
|              | Other                  | Other                                                                                                                         |                                                                       |
| Test Channel | PAN ____               | Test function                                                                                                                 |                                                                       |
| Manual Ctrl. | PAN =XXX<br>:          | Fine adjustment of the lamp                                                                                                   |                                                                       |
| Calibration  | -Password-<br>PAN<br>: | Password "050"<br>Calbrate and adjust the effects to standard/right position                                                  |                                                                       |
|              | Gobo Focus Comp        | Service PIN = XXX<br>RotGobo1Single<br>FixGoboSingle                                                                          |                                                                       |
| Preset       |                        |                                                                                                                               |                                                                       |
|              | Select Prog.           | Prog. Part 1 = Program 1 ~ 10 Program 1<br>Prog. Part 2 = Program 1 ~ 10 Program 2<br>Prog. Part 3 = Program 1 ~ 10 Program 3 | Select programs to be run                                             |
|              | Edit Prog.             | Program 1<br>:<br>Program 10                                                                                                  | Program Test<br>Step 01=SCxxx<br>Step 64=SCxxx                        |
|              | Edit Scenes            | Edit Scene 001<br>~ Edit Scene 250                                                                                            | Pan,Tilt,.....<br>--Fade Time--<br>--Scene Time--<br>Input By Outside |
| Scenes Input | XX-XX                  | Scenes Input                                                                                                                  |                                                                       |

## 10.1 › ADDRESS

### 10.1.1. Address

With this function, you can adjust the DMX address, the Universe and the selection of the control signal

## 10.2 › MODE

### 10.2.1. User Mode

With this function, you can choose user defined channel orders.

### 10.2.2. Edit User Mode

With this function, you can edit user defined channel orders of User Mode A/B/C.

## 10.3 › OPTIONS

### 10.3.1. Status

#### No DMX Status

With this function, you can choose the unit behavior in case no

signal is detected between Close (all dmx value to 0), Hold (keep the last dmx value), and Auto (start auto mode).

#### Sun Protection

When this function is activated, the unit will automatically tilt down its head toward the ground when no signal is detected.

#### Pan Reverse

With this function you can reverse the Pan-movement.

#### Tilt Reverse

With this function, you can reverse the Tilt-movement.

#### Pan Degree

With this function, you can select the total Pan degree range between 630 or 540.

#### Feedback

This function allows you to activate or deactivate the automatic repositioning of the Pan & Tilt in case of an accidental/manual move of the yoke.

#### Init PAN

This function allows you to deactivate the Pan movement.

#### Init TILT

This function allows you to deactivate the Tilt movement.

#### Prerig INIT

Allows you to activate a special init process: Pan init then Tilt init process when unit is used in prerig trusses

#### Reset Mode

This function allows you to choose the reset process for the gobo.

- **Fast** : The fixture only check the direction of the first gobo
- **All Rot Gobo** : The fixture is checking all the position of each gobo to make sure all the gobo are in the same position (Useful if using a custom Gobo)

#### Pan/Tilt Spd

With this function, you can select Pan & Tilt speed from "Fast", "Medium", "Slow", "FS Mode", "Tracking 360".

- **Tracking 360 Mode**
  - **Visual Feedback** – When activated, the fixture will pan 90 degrees from its normal position to indicate the mode is enabled.
  - **Pan & Tilt Adjustments** – In this mode, the pan range is limited to 360 degrees with a shortcut (-180 ° to +180 °) for smoother control. The tilt range remains unchanged. Make sure the correct tilt setting is selected (default is 270 °, with an option for '540 °').
  - **Enhanced Responsiveness** – Acceleration and deceleration are optimised for quicker, more precise tracking performance.
- **FS Mode**
  - **Enhanced Responsiveness** – Acceleration and deceleration are highly reactive to improve tracking performance.

#### Hibernation

The device and stepper motors will be powered off if the unit stays without DMX signal for the User defined times (in Minutes). The fixture will perform a reset sequence once DMX is back.

#### DMX Output

With this function, the unit can transmit the signal received via WDMX or ArtNet/sACN through the DMX output.

### 10.3.2. Service PIN

#### Password

The Password for this function is "050".

#### RDM UID

With this function, you can display the RDM UID of the Unit.

#### Set IP

This function allows you to set the IP of the Unit.

#### Set Mask IP

This function allows you to set the IP Mask of the Unit.

#### DHCP

This function allows you to enable or disable the DHCP

#### Cross Load SW

This function allows you to upload the current SW version to other units using a DMX connection. Do not disconnect the units before the process is complete.

#### Clr Error Info

This function allows you to clear the error info list.

### 10.3.3. Fans Control

#### Fans Speed

With this function, you can set the fans speed. Settings are Auto, Stage, Silence, and Super Silence.

- **Auto**: The LED module delivers **high** output and the fans ramp up and down depending on the ambient temperature and the temperature of the LED module itself.
- **Stage**: The LED module delivers **full** output and the fans remain at full speed regardless of the temperature of the LED module.
- **Silence**: The LED module is limited to **medium** output and the fans rotate at a slower speed.
- **Super Silence**: The LED module is limited to a **lower** output and the fans rotate at the slowest speed.

For specific output details, refer to photometry document.

#### Constant Fans

Enables you to set the fans to run continuously, even when the LED is off.

### 10.3.4. Disp. Setting

#### Shut off Time

With this function, you can select the delay before the LCD display turns off. Choose between 2 to 60 minutes. The default is 5 minutes.

#### Flip Display

With this function you can rotate the display by 180° (when the unit is rigged)

#### Key Lock

With this function you can activate the automatic key lock function. If this function is activated, the keys will be locked automatically after exiting the edit mode for 15 seconds. Keeping press the <MODE/ESC> key for 3 seconds if you do not need this function.

#### DispFlash

With this function activated, display will flash if no signal is detected.

### 10.3.5 Temperature C/F

With this function you can display the temperature in Celsius or Fahrenheit.

### 10.3.6. Initial Pos.


With this function you can display initial effect position.

### 10.3.7. Wireless

From factory, this projector is prepared for wireless data transmission (W-DMX). If you wish to de-activate W-DMX control, you can select the function "De-activate WDMX" by turning the encoder. With the function "Rest", you can log out the projector from the wireless sender.

### 10.3.8. Dim Curve

With this function you can select the Dimmer Curve.



### 10.3.9. Refresh Select

With this function you can select the PWM rate.

- 12K & 2.4 : provides superior dimming quality, especially for smooth fadeouts at lower levels
- 16K & 25K : are ideal for broadcast use

### 10.3.10. Gobo Correction

This function allows you to enable or disable the Gobo Correction. The Unit will automatically insert a correction filter when a glass gobo is inserted.

### 10.3.11. Head Heater

This function allows you to enable or disable the Head heater.

### 10.3.12. Trigger

#### DMX Value Dip.

With this function you can display the DMX 512 value of each channel. The display automatically shows the channel with a value changing.

#### Set to Follower

With this function, you can define the device as follower.

#### Auto Program

With this function, you can run the internal program. You can select the desired program under "Select program". You can set the number of steps under "Edit program". You can edit the individual scenes under "Edit scenes". With this function, you can run the individual scenes either automatically, i.e. with the adjusted Step-Time.

### 10.3.13. Reset Default

With this function, you can select restore factory set for ON or OFF. the default is OFF.

### 10.3.14 Rst Options

This function restores only the altered options settings (highlighted values in the chart above) to their default state.

### 10.3.16. Reset User

With this function, you can define the following "restore user" values:

- Address
- Mode
- Fans Speed
- Constant Fans

## 10.4 > INFO

### 10.4.1. Time Info.

#### Current Time

With this function, you can display the temporary running time of the device from the last power on. The display shows "XXXX". "XXXX" stands for the number of hours. The counter is reset after turning the device off.

#### Ttl Life Hrs

With this function, you can display the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

#### Last Run Hrs

With this function, you can display last the running time of the device. The display shows "XXXX". "XXXX" stands for the number of hours.

#### LED Hours

With this function, you can display the time of LED. The display shows "XXXX". "XXXX" stands for the time of LED.

#### Timer PIN

With this function, you can display the timer password.

#### Clr Last Run

With this function, you can clear last run time of the fixture. The display shows "ON" or "OFF". Press "Enter" to confirm.

### 10.4.2. Temp.Info

With this function you can display the different temperature of the fixture.

- L: Light engine
- B: Base
- H: Head

### 10.4.3. Humidity

With this function you can display all the different humidity values available in the fixture

- B: Base
- H: Head

### 10.4.4. Fan Info.

With this function, you can display all the fan speed values available in the unit.

### 10.4.5. Software Ver

With this function, you can display the software version of the device.

### 10.4.6. Network

With this function, you can display the Network information.

### 10.4.7. Error Info

With this function, you can Read the error record of the Unit.

## 10.5 > TEST

### 10.5.1. Home

With this function you can reset the device. You can select which functions you want to reset by using the submenu.

### 10.5.2. Test Channel

With this function you can test each channel's function to ensure correct operation.

### 10.5.3. Manual Control

Allows you to manually control each feature of the unit

### 10.5.4. Calibration

With this function, you can calibrate and adjust the effect wheels to their correct positions. The password of calibrate values is 050.

### 10.5.5. Gobo Focus Comp

With this function, you can calibrate and adjust the calibration of each gobo individually

## 10.6 > PRESET

Run the auto program: A leader fixture can output to three different program signals to the follower fixture to operate. It means the host will send cyclically in the following orders (The host will keep operating the program of Part 1). Then the follower fixture will make the selectively receiving according to its own set.



- If the follower fixture chooses Run For Follower 1 from the menu of 1-3, then it will receive the part 1's automatic program from link, in the same way, when the follower fixture chooses Run For Follower 2, then it will receive the part 2's automatic program from link.
- Enter the menu of 1-3 Function Mode---Set To Follower. Here to set machine operate which part of the program during the host-follower connection
- Enter the menu of 1-4, 1-5 Function Mode---Set To Leader
- Enter the menu of 8-1 Edit Program---Auto Program Part1. The host outputs three groups driven program---Part1, Part2, Part3 (Part1 program runs the same effect as the host)
- Enter the menu of 8-2 Edit Program---Edit Program. Edit the program's connection, connect the scene in order

- The editor of the scene, there are as many as 250 scenario editors, and every scene can have a program connection of 10.

**Note:**

Part 2, Part 3 repeat in accordance with the Part1's repeat. For example: When Part 1 uses Program 2, Part 2 uses Program 4, Part 3 uses Program 6, Assume:Program 2 includes scene of 10, 11, 12, 13. Program 4 includes scene of 8, 9, 10; Program 6 includes scene of 12, 13, 14, 15. Then it will run as below.

**Example:**

**Part 1:**



**Part 2:**



**Part 3:**



## 10.7 > SHORTCUT MENU

### 10.7.1. Flip display

With this function you can rotate the display by 180° (when the unit is rigged)

### 10.7.2. Restore Factory

With this function, you can restore default setting (highlighted value in the above chart).

### 10.7.3. Restore User

With this function, you can restore User settings (Setting can be edit under Options/Reset User Set).

### 10.7.4. Rst DMX addr 1

With this function you can only set the address to 1.

### 10.7.5. Rst Options

This function restores only the altered options settings (highlighted values in the chart above) to their default state.

### 10.7.6. Product SN

With this function, you can display the serial number of the Unit.

### 10.7.7. LED SN

With this function, you can display the serial number of the LED.

### 10.7.8. RDM UID

With this function, you can display the RDM UID of the Unit (Also QRCode)

### 10.7.9. Pressure

Under this menu, you can manage the pressure of the Unit :

- Pressure Test : Under this menu you can Run the Pressure test
- Test Result : Under this menu you can display the result of the last pressure test
- Head/Base Pres : Under this menu you can display the value of the Head and Base Pressure

## 11. DMX PROTOCOL

Scan the QR code on the cover page to download the DMX CHART.

## 12. ERROR MESSAGES

When you turn on the device, it will first perform a reset. The display may show "Err channel is XX" should there be problems with one or more functions. "XX" stands for

channel 1, 2, 3, 4, 5, 6 etc whose sensor has encountered a problem. For example, when the display shows "Err channel is Pan movement", it means there is an error on channel 1. If there are errors on channel 1, channel 3, channel 6 at the same time, you may see the error message, "Err channel is Pan movement", "Err channel is Tilt movement", "Err channel is Shutter", flash twice, and then the device will generate a second reset. If the error messages persist after performing a reset more than twice, the channels which have errors may not work properly however, all other functions can work as usual. Please contact your dealer or manufacturer for service. Self repair is not allowed.

### PAN- movement Er

(PAN- yoke movement error) This message will appear after the reset of the fixture if the yoke's magnetic-indexing circuit malfunction (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The PAN-movement is not located in the default position after the reset.

### TILT- movement Er

(TILT- head movement error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions ((Optical Sensor or Magnetic Sensor fails)) or the stepper motor is defective (or its driving IC on the main PCB). The TILT-movement is not located in the default position after the reset.

### Zoom wheel Er

(Zoom wheel error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Zoom -movement is not located in the default position after the reset.

### Focus wheel Er

(Focus wheel error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (Optical Sensor or Magnetic Sensor fails) or the stepper motor is defective (or its driving IC on the main PCB). The Focus -movement is not located in the default position after the reset.

### Colour wheel Er

(Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The Colour - movement is not located in the default position after the reset.

### Cyan Colour wheel Er

(Cyan Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

### Magenta Colour wheel Er

(Magenta Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

### Yellow Colour wheel Er

(Yellow Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions (sensor failed or magnet missing) or the stepper motor is defective (or its driving IC on the main PCB). The CMY -movement is not located in the default position after the reset.

### CTO Colour wheel Er

(CTO Colour wheel- error) This message will appear after the reset of the fixture if the head's magnetic-indexing circuit malfunctions



### 13. CLEANING AND MAINTENANCE

#### CAUTION



Disconnect from mains before starting maintenance operation



Always run an IP test using the Ayrton IP test kit following any maintenance operation! Failure to comply with this clause will void the warranty!



Ayrton IP Kit

The operator must follow strictly the vacuum and pressure setting values as below, or use the corresponding preset fixture menu to run the IP test. any overpressure operation may cause accidental damage or injury.

#### Note:

*The following points have to be considered during inspection:*

- *All screws for installing the devices or parts of the device have to be tightly connected and must not be corroded.*
- *There must not be any deformations to the housing, lenses, rigging and installation points (ceiling, suspension, trussing).*
- *Motorized parts must not show any signs of wear and must move smoothly without issue.*
- *The power supply cables must not show any damage, material fatigue or sediment.*

Further instructions depending on the installation location and usage have to be adhered to by a qualified installer and any safety concerns have to be removed.

In order to ensure the device remains in good condition and does not fail prematurely, we suggest regular maintenance.

- Clean the outside lens each week to avoid loss of output due to accumulation of dust/ dirt on the lens.
- Clean the outside fans each week to ensure maximum airflow and efficient thermal cooling. This will ensure the light source is operated in the best possible condition.
- A detailed electrical check by an approved electrician every quarter to make sure that the circuit contacts are in good condition. This will prevent poor circuit contacts and the resultant overheating.

We recommend frequent cleaning of the device. Please use a moist, lint-free cloth. Never use alcohol or solvents. Please refer to the instructions under "Installation instructions".

Should you need any spare parts, please order genuine parts from your local dealer.

