

Teranex Mini Audio to SDI 12G



£415

Embed up to 2 channels of audio from balanced analog, optical or HiFi RCA, or embed up to or 4 channels of AES/EBU digital audio into any SD, HD, Ultra HD or DCI 4K SDI video connection. Take audio from devices such as audio mixers, iPods and analog decks and embed it into SDI video connections for use with SDI routers and decks.

Connections

SDI Video Inputs

1 x 12G-SDI SD/HD/2K/4K auto switching.

SDI Video Outputs

1 x 12G-SDI output.

Analog Audio Inputs

2 channels professional balanced analog audio via XLR connectors, or 2 channel unbalanced analog line level via RCA connectors. Right XLR can be configured for timecode input.

Digital Audio Inputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode input.

Embedded Audio Support

16 channels.

Optical Audio Input

S/PDIF Signal with TOSLINK Connector.

Multi Rate Support


Automatic switching between SD/HD/2K and 4K.

Updates and Configuration

USB or Ethernet.

Reclocking

Yes

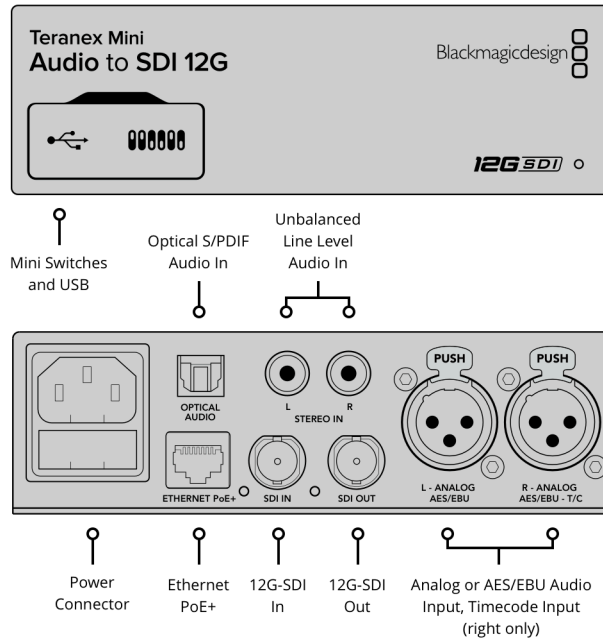

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF30
1080i50, 1080i59.94, 1080i60

2K Video Standards

1080p23.98, 1080p24, 1080p25
1080PsF23.98, 1080PsF24, 1080PsF25

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI
25p

SDI Compliance

SMPTE 259M, SMPTE 292M,
SMPTE 296M, SMPTE 372M,
SMPTE 424M, SMPTE 425M Level B,
SMPTE 297M for Optical Fiber SDI,
SMPTE 2081-1, SMPTE 2081-10,
SMPTE 2082-1, SMPTE 2082-10

SDI Video Rates

SDI video connections are auto
switching between standard
definition SDI, 1.5G-SDI, 3G-SDI,
6G-SDI and 12G-SDI.

SDI Video Sampling

4:2:2, 4:4:4

SDI Audio Sampling

Television standard sample rate of 48
kHz and 24-bit.

SDI Auto Switching

Automatically selects between SD,
HD, 3G, 6G and 12G-SDI.

SDI Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K
and 4K.

SDI Color Space

REC 601, REC 709

Software

Software Control

Mac™ and Windows™ software
upgrade via USB and Ethernet.

Internal Software Upgrade

Via included updater application.

Operating Systems



Mac 10.14 Mojave,
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

Settings Control

Basic Settings Control

Mini Switches, USB and Ethernet via
free software utility

Optional Front Panel Control

Front mounted Smart Panel with LCD,
rotary knob and six settings buttons

Power Requirements

Power Supply

1 x built in international AC power
supply with IEC C14 inlet. IEC Power
cable required. 90 - 240V AC Input.

Power Over Ethernet

Can be powered via 48V DC using
PoE+ (power over ethernet).

Power Consumption

16 Watts

Operational Voltage Range

90 - 240V AC

Physical Specifications



Environmental Specifications

Operating Temperature
0° to 40°C (32° to 104°F)

Storage Temperature
-20° to 60°C (-4° to 140°F)

Relative Humidity
0% to 90% non-condensing

What's Included

Teranex Mini Audio to SDI 12G
SD card with software and manual

Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller