REBEL™ LINE 8

8x60W IP65 RGBL Wash Fixture

DATA SHEET



KEY FEATURES

(8) 60W RGBL LEDs with Pixel Control

(16) 5W CW Sparx LEDs with Pixel Control

11,548 Total Fixture Lumen Output (Sphere)

4° - 35° Beam Angle

Fast and precise 210° Tilt Rotation

IP55 Tilt FX Fixture

The **REBEL LINE 8** defies expectations for linear lighting in a compact 8-cell format, delivering impressive output, precision, and color consistency in a versatile IP55 design. Its eight high-intensity 60W RGBL engines and sixteen CW SparkX pixels ignite the stage with 11,548 lumens of relentless, full-spectrum brilliance.

A seamless linear lens system and rapid 210° tilt movement create bold, continuous beams that transform effortlessly from razor-sharp aerials to a smooth, enveloping wash. The integrated Sparkle Beam FX adds refined texture, while the SparkX cool-white crossing beams cut through the scene with crisp, unmistakable definition.

A built-in magnetic alignment system allows the **REBEL LINE 8** to snap together with other LINE fixtures, forming flawless beam lines and high-impact pixel effects that read as one continuous visual element across any stage. Paired with its rugged IP65 construction and compact, tour-ready form, the **REBEL LINE 8** is built for environments demanding bold intensity, sweeping kinetic motion, and advanced pixel artistry for any stage.

Specifications are subject to change without notice ©Elation Professional 06/02/2026

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | www.elationlighting.eu | info@elationlighting.eu

REBEL™ LINE 8

8x60W IP65 RGBL Wash Fixture

SPECIFICATIONS

SOURCE
(8) 60W RGBL LEDs
(16) 5W CW SparkX LED Pixels
30,000 Hour Average LED Life*

*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA
Total Lumen Output:
Integrating Sphere
All LED: 11,548 Lumens
RGBL LED: 7,128 Lumens
CW LED: 4,752 Lumens
CRI 82
Zoom Range 4° - 35°

EFFECTS
Motorized Zoom
Full Pixel LED Control
SparkX LED Beam Effect
Electronic Dimmer and Strobe
Variable 16-bit Dimming Modes and Curves
Tilt Angle: 210°

COLOR
RGBL LED Array
CW SparkX LED Array
Variable CCT 2400K - 8500K
Virtual Gel Swatch Book

CONTROL / CONNECTIONS
3 DMX Channel Modes (22/30/70 channels)
DMX Adjustable Refresh Rate (900 -25000 Hz)
4 Button Control Panel, LED Display
Aria x2 Wireless Device Management
NFC Configuration
DMX, RDM, Art-NET, sACN Protocol Support
IP65 Locking 5pin XLR Connector In/Out
IP65 Locking RJ45 Ethernet Connector In/Out
IP65 Locking Power Cable In/Out

SIZE / WEIGHT
Length: 19.8 in (502mm)
Width: 6.5 in (164mm)
Height (head up): 13.2 in (336mm)
Height (head 90 degree): 10.0 in (254mm)
Weight: 29.3 lb (13.3 kg)

ELECTRICAL / THERMAL
AC 100-240V 50/60Hz
810W Max Power Consumption
Ambient Temperature Range: -4ºF to 113ºF (-20ºC to 45ºC)
BTU/hr (+/- 10%) 2762.1

INCLUDED ITEMS
Omega Brackets (x2)
Blank Name Plate
Front Louver/Grid
Diffusion Filter
Safety Cable IP65 Rated
IP65 Locking Power Cable

APPROVALS / RATINGS
CE | cETLus | IP55 | FCC | UKCA

ORDERING INFORMATION

SKU (US)	SKU (EU)	DESCRIPTION
REB208	1236100200	Elation Rebel Line 8





Specifications are subject to change without notice ©Elation Professional 06/02/2026


Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | www.elationlighting.com | info@elationlighting.com


Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | www.elationlighting.eu | info@elationlighting.eu


W/O FROST FILTER

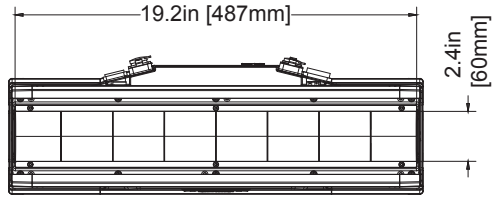




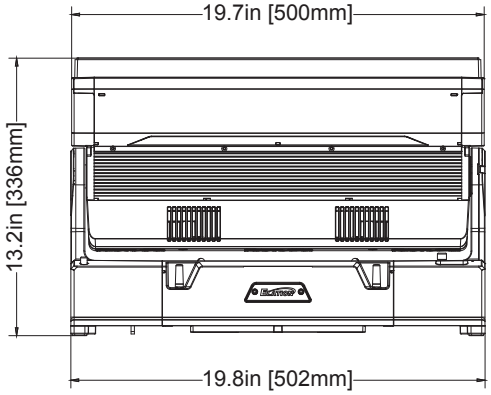

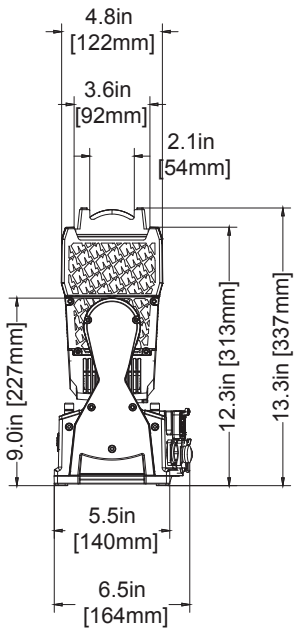

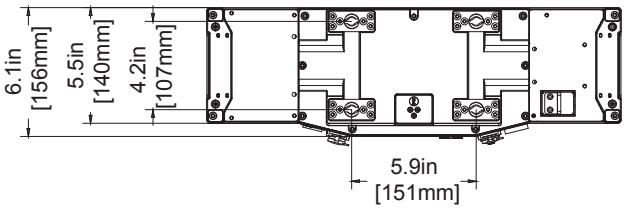


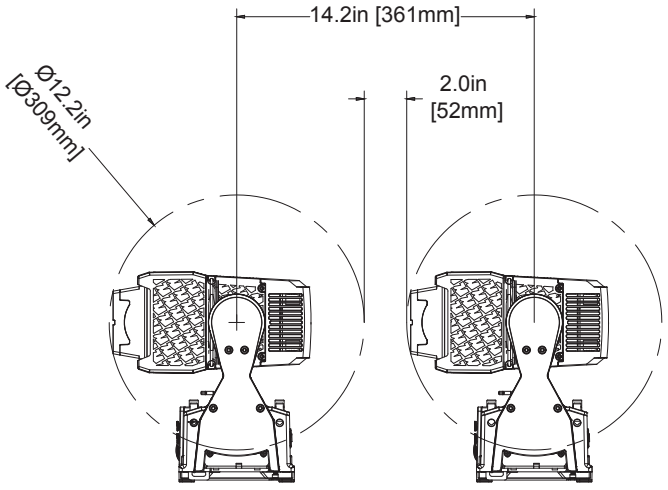



Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | www.elationlighting.com | info@elationlighting.com


Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | www.elationlighting.eu | info@elationlighting.eu

WITH FROST FILTER

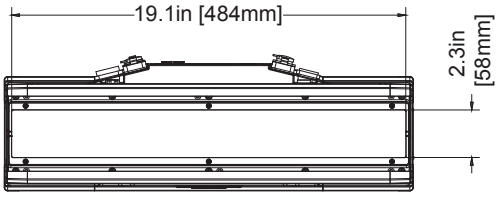



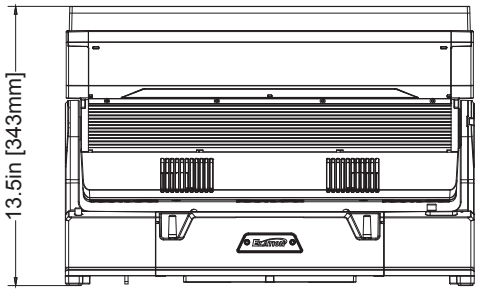



Specifications are subject to change without notice ©Elation Professional 06/02/2026

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | www.elationlighting.eu | info@elationlighting.eu