ETC

ColorSource Fresnel VXT MAX

ColorSource Series



Type(s)

Project

Date

Notes

GENERAL INFORMATION

An IP65-rated LED luminaire crafted by lighting experts with a proven history of quality fixtures, ColorSource Fresnel VXT MAX doubles the output of the existing ColorSource Fresnel V but still brings a richness of color and leading technology at a price point you'll love – now for outdoor venues. Featuring a five-color array of red, green, blue, indigo, and lime, the ColorSource Fresnel VXT MAX provides soft pastels and bold saturated colors from a single fixture. Control the motorized zoom using DMX or manually from the rear of the fixture. ColorSource Fresnel VXT MAX also features wireless DMX/RDM control using Multiverse® technology, NFC configuration from your mobile device, and next level brightness, making it the ultimate in affordable wash light technology.

FEATURES

- Five-color array (red, green, blue, indigo, and lime)
- IP65-rated housing
- Motorized 15–40 degree zoom with DMX and local control
- Simple user interface with seven-segment display
- Seetronic X Series IP65 power input (powerCON® TRUE1® compatible)
- DMX/RDM in and thru (5-pin XLR)
- Multiverse wireless DMX/RDM
- NFC (near field communication) configuration
- LED droop compensation
- Optically calibrated
- Tour-ready aluminum housing

APPLICATIONS

- Outdoor theatres and performance spaces
- Houses of worship
- Universities and schools
- Facade lighting
- Hospitality
- Retail
- Exhibition centers
- Meeting rooms
- Clubs
- Cafetoriums

ORDERING INFORMATION

ColorSource Fresnel VXT MAX

Model	Description	ETL Part Number	CE Part Number	
CSFRESVXTMAXMV	ColorSource Fresnel VXT MAX LED Fixture, black	7427A1012	7427A1212	

Color options: -1 = white, -5 = silver gray, -8 = custom colors.

Also available without Multiverse wireless control. Contact your dealer for ordering information.

All ETL fixtures ship with Seetronic X Series IP65 to pass-thru power cable (7427B7030). All CE fixtures ship with Seetronic X Series IP65 to bare-end power cable (7427B7035). Additional ordering information (including accessories) can be found on page 8.

PRODUCT SPECIFICATIONS

Source

LED details	60 Lumileds LUXEON® C ES LEDs
Max lumens	Field: 11,296 Sphere: 11,821
Lumens per watt	50.3
L70 rating (hours to 70% output)*	54,000 hours

Color

Colors used	Red, Green, Blue, Indigo, Lime
Color temperature range	Color mixing
Calibrated array	Yes
Red shift	No

Optical

Beam/Field angle range	15–40° (Beam) 25–55° (Field)
Gate size	N/A
Aperture size	190 mm (7.48 in)
Pattern projection	No
Pattern size	N/A
Camera flicker control/Hz range	5,000 Hz (default) and 25,000 Hz (via RDM)

Control

Input method	5-Pin XLR (outdoor rated), Multiverse wireless, and NFC
Protocols	DMX-512, RDM, City Theatrical Multiverse, NFC
Modes (footprint)	9 modes, see page 7
RDM configuration	Yes
UI type	Seven-segment display, four-button interface
Local control	Yes
Onboard presets	Yes (12)
Onboard sequences	Yes (5)
Onboard effects	No
FixtureLink	Yes
Notes	16-bit dimming and color control

Wireless

Band	2.400–2.480 GHz
Range	100 m indoors, 500 m line of sight (subject to conditions)
Max receivers	DMX: No limit RDM: Varies by transmitter used Multiverse SHoW Baby®: 585 Multiverse Transmitter: 5,000
Broadcast power	100 mW

Electrical

Voltage range	100–240 VAC 50/60 Hz
Input method	Seetronic X Series IP65 input (powerCON TRUE1 compatible)
Inrush (first half-cycle)	120 V: 8 A 240 V: 14 A
Fixtures per circuit on standard R20 breaker	4 (link up to 3 via Power Thru connector)* Note: TRUE1 connector rated for 20 A (120 V / 60 Hz) and 16 A (240 V / 50 Hz)
Wattage (typical)	120 V: 216 W 230 V: 210 W
Current draw	120 V: 2.2 A 230 V: 0.93 A

*Note: All measurements are for 120 V, 60 Hz. Results may vary in different regions.

Thermal

Ambient operating temp	-20°C–40° C (-4°F–104° F)
Fan (controllable)	Yes (yes)
Droop compensation	Yes
Average dB	33 dBA @ 1 m
BTUs/hour (120 V)	737

Physical

Materials	Cast and extruded aluminum
Color options	Black, white, silver, or custom color
Mounting options	Yoke
IP rating	IP65
Weight	7.89 kg (17.4 lb)
Included accessories	Yoke, power cable

Warranty

Fixture	5 years
LED array	10 years

Regulatory and Compliance

Approved regulatory standards	cETLus Listed Conforms to UL 1598 Conforms to UL 8750, LED luminaire Complies to CSA C22.2 No. 250.0 CE & UKCA compliant

*Note: All LED sources experience some lessening of light output and some color shift over time. LED output will vary with thermal conditions. In individual situations, LEDs will be used for different durations and levels. This can eventually lead to minor alterations in color performance, necessitating slight adjustments to presets, cues or programs.


PRODUCT FEATURES



IP65
Rated for outdoor use, these IP65-rated fixtures bring bold colors and soft pastels to your venue, no matter what the weather.




WIRELESS
Multiverse gives you up to 10 universes of wireless DMX/RDM control. And NFC configuration is standard with ETC's free Set Light app on your mobile device.

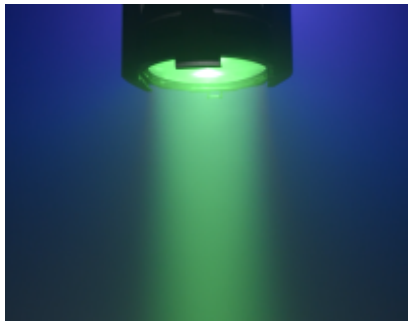

MOTORIZED ZOOM
Control the 15°–40° zoom via DMX or focus it manually from the rear of the fixture.


COLOR METRIC INFORMATION

COLORSOURCE FRESNEL VXT MAX 3200 K BRIGHTEST TM-30-18

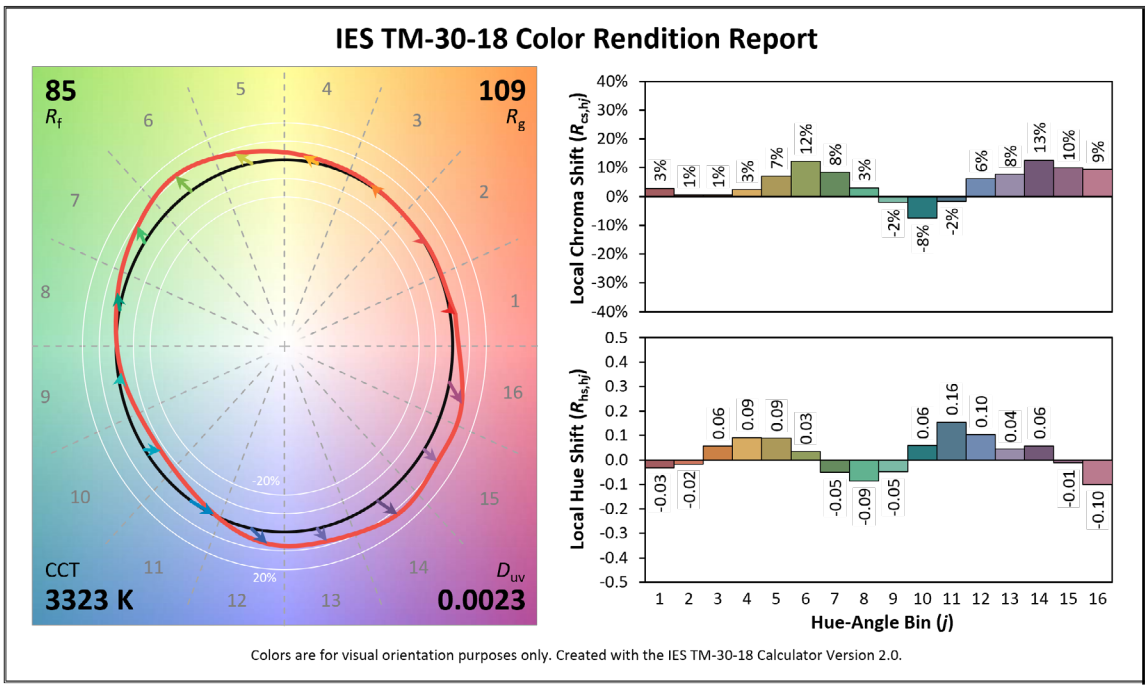


COLOR METRIC INFORMATION

COLORSOURCE FRESNEL VXT MAX 3200 K BEST SPECTRAL TM-30-18

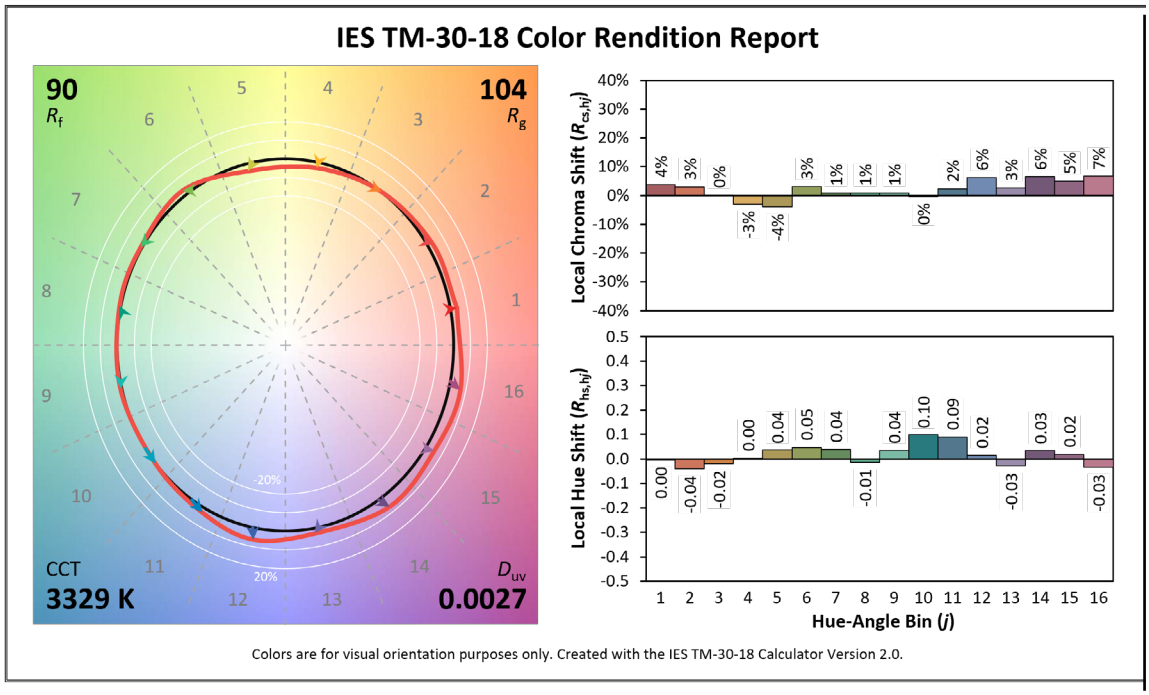


COLORSOURCE FRESNEL VXT MAX 5600 K BRIGHTEST TM-30-18

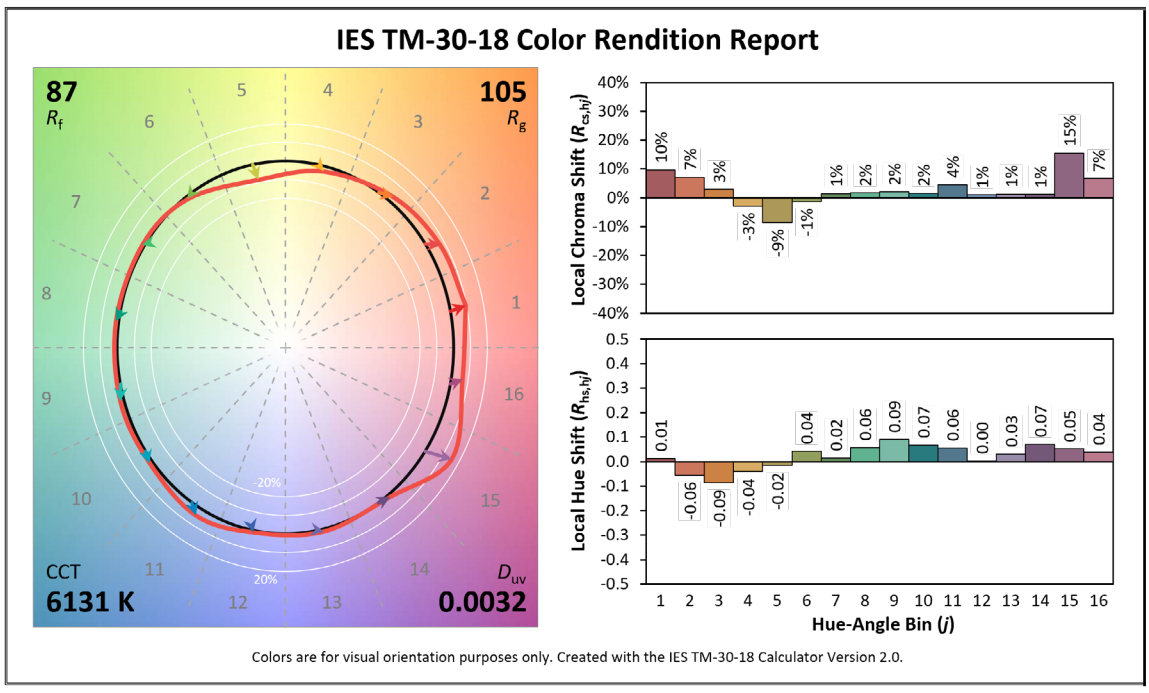

COLOR METRIC INFORMATION

COLORSOURCE FRESNEL VXT MAX 5600 K BEST SPECTRAL TM-30-18

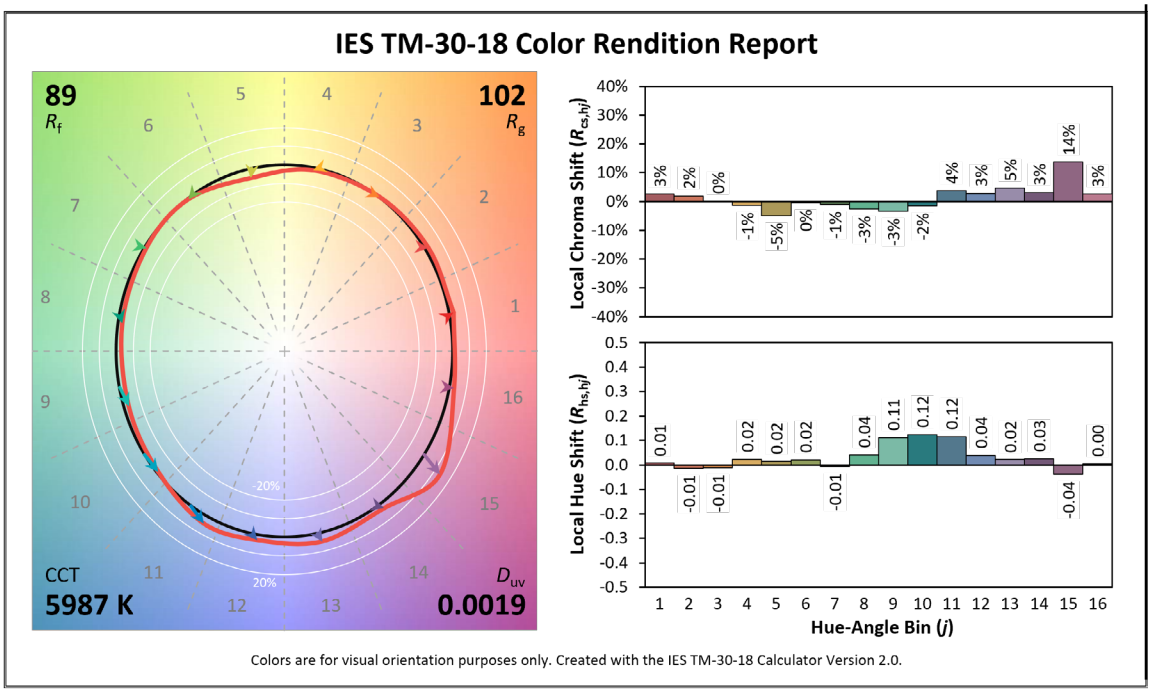


PHOTOMETRY INFORMATION

ColorSource Fresnel VXT MAX Narrow

Mode	Degree	Candela	Field Lumens	Beam Lumens	Sphere Lumens	Power Consumption	Lumens Per Watt
Full On Direct - Boost	15.1	142,106	9,279	5,707	10,672	235	45.4
Full On Direct	15.1	117,540	7,675	4,720	8,827	196	45.1
3200 K Brightest	15.1	94,609	6,178	3,800	7,105	139	51.2
3200 K Spectral	15.1	88,643	5,788	3,560	6,657	136	48.8
5600 K Brightest	15.1	97,630	6,375	3,921	7,332	173	42.3
5600 K Spectral	15.1	98,014	6,400	3,936	7,360	161	45.8

Metric conversions: For meters, multiply feet by 0.3048. For lux, multiply footcandles by 10.76.

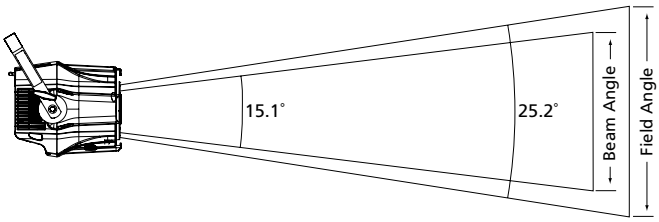

Throw Distance (d)	10 ft 3.0 m	15 ft 4.6 m	20 ft 6.1 m	30 ft 9.1 m
Field Diameter	4.4 ft 1.34 m	6.71 ft 2.1 m	8.94 ft 2.68 m	13.41 ft 4 m
Illuminance (fc)	1175	522	294	131
Illuminance (lux)	13060	5555	3265	1451

To determine center beam illumination in footcandles at any throw distance, divide candela by the throw distance squared.


For field or beam diameter at any distance, use the MyETC: Photometrics app or available photometrics spreadsheet.

PHOTOMETRY INFORMATION

ColorSource Fresnel VXT MAX Medium

Mode	Degree	Candela	Field Lumens	Beam Lumens	Sphere Lumens	Power Consumption	Lumens Per Watt
Full On Direct - Boost	20	95,780	10,745	6,693	11,811	235	50.3
Full On Direct	20	79,222	8,887	5,536	9,769	196	49.9
3200 K Brightest	20	63,766	7,153	4,456	7,863	139	56.6
3200 K Spectral	20	59,745	6,702	4,175	7,367	136	54.1
5600 K Brightest	20	65,802	7,382	4,598	8,114	173	46.8
5600 K Spectral	20	66,061	7,411	4,616	8,146	161	50.7

Metric conversions: For meters, multiply feet by 0.3048. For lux, multiply footcandles by 10.76.

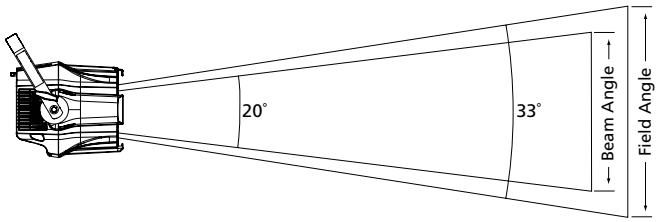

Throw Distance (d)	10 ft 3.0 m	15 ft 4.6 m	20 ft 6.1 m	30 ft 9.1 m
Field Diameter	5.92 ft 1.78 m	8.89 ft 2.73 m	11.85 ft 3.55 m	17.77 ft 5.33 m
Illuminance (fc)	792	352	198	88
Illuminance (lux)	8802	3744	2201	978


To determine center beam illumination in footcandles at any throw distance, divide candela by the throw distance squared.

For field or beam diameter at any distance, use the MyETC: Photometrics app or available photometrics spreadsheet.

ColorSource Fresnel VXT MAX Wide

Mode	Degree	Candela	Field Lumens	Beam Lumens	Sphere Lumens	Power Consumption	Lumens Per Watt
Full On Direct - Boost	40	28,709	11,296	8,747	11,821	235	50.3
Full On Direct	40	23,746	9,344	7,235	9,777	196	49.9
3200 K Brightest	40	19,114	7,521	5,824	7,870	139	56.7
3200 K Spectral	40	17,908	7,046	5,456	7,374	136	54.1
5600 K Brightest	40	19,724	7,761	6,009	8,121	173	46.9
5600 K Spectral	40	19,801	7,791	6,033	8,153	161	50.7

Metric conversions: For meters, multiply feet by 0.3048. For lux, multiply footcandles by 10.76.

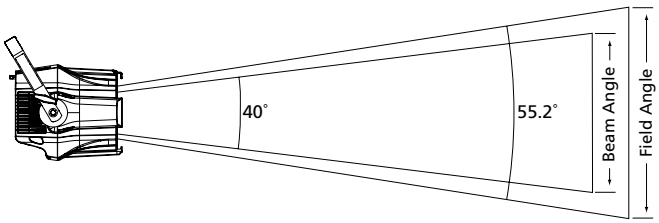

Throw Distance (d)	10 ft 3.0 m	15 ft 4.6 m	20 ft 6.1 m	30 ft 9.1 m
Field Diameter	10.46 ft 3.14 m	15.68 ft 4.81 m	20.91 ft 6.27 m	31.37 ft 9.41 m
Illuminance (fc)	237	106	59	26
Illuminance (lux)	2638	1122	660	293

To determine center beam illumination in footcandles at any throw distance, divide candela by the throw distance squared.

For field or beam diameter at any distance, use the MyETC: Photometrics app or available photometrics spreadsheet.

CONTROL

DMX Input Channel Profiles

DMX PROFILE	DMX CHANNELS	CHANNEL ASSIGNMENTS		NOTES
Stn: Standard (Default mode)	8	1–Intensity 2–Red 3–Green 4–Blue	5–Strobe 6–Zoom 7–Fan 8–Curve	Indigo and Lime are mixed automatically.
RGB	4	1–Red 2–Green	3–Blue 4–Zoom	Indigo and Lime are mixed automatically.
1ch: 1-channel	1	1–Intensity		Controls the intensity of Preset 1.
Dir: Direct	10	1–Intensity 2–Red 3–Green 4–Blue 5–Indigo	6–Lime 7–Strobe 8–Zoom 9–Fan 10–Curve	Provides direct emitter control.
6ch: 6-channel	6	1–Intensity 2–Red 3–Green	4–Blue 5–Strobe 6–Zoom	Uses the legacy white point (5400 K) and strobe function from the original ColorSource family. Indigo and Lime are mixed automatically.
CCT: Studio	8	1–Intensity 2–CCT 3–Tint 4–Tune	5–Strobe 6–Zoom 7–Fan 8–Curve	Studio mode.
St2: Standard 16-bit	12	1–Intensity Coarse 2–Intensity Fine 3–Red Coarse 4–Red Fine 5–Green Coarse 6–Green Fine	7–Blue Coarse 8–Blue Fine 9–Strobe 10–Zoom 11–Fan 12–Curve	16-bit mode. Coarse and Fine values work together as a pair. The Coarse value adjusts the parameter in larger, potentially more noticeable steps. The Fine value provides adjustments within each Coarse step.
Dr2: Direct 16-bit	16	1–Intensity Coarse 2–Intensity Fine 3–Red Coarse 4–Red Fine 5–Green Coarse 6–Green Fine 7–Blue Coarse 8–Blue Fine	9–Indigo Coarse 10–Indigo Fine 11–Lime Coarse 12–Lime Fine 13–Strobe 14–Zoom 15–Fan 16–Curve	16-bit mode. Coarse and Fine values work together as a pair. The Coarse value adjusts the parameter in larger, potentially more noticeable steps. The Fine value provides adjustments within each Coarse step.
CT2: Studio 16-bit	10	1–Intensity Coarse 2–Intensity Fine 3–CCT Coarse 4–CCT Fine 5–Tint	6–Tune 7–Strobe 8–Zoom 9–Fan 10–Curve	16-bit mode. Coarse and Fine values work together as a pair. The Coarse value adjusts the parameter in larger, potentially more noticeable steps. The Fine value provides adjustments within each Coarse step.

ADDITIONAL ORDERING INFORMATION

Accessories

Accessories are considered perishable when used outdoors.

MODEL	DESCRIPTION	PART NUMBER	
407CF	Color frame (7.5 in)	7061A3007	
400SC	Safety cable	7060A1022	
400SC-SS	Safety cable, stainless steel	7060A1022-SS	
400CC	C-clamp	7060A2009	
N/A	Mega Clamp, black	SGHW1016	
400PTH3	Top hat, 3 in	PSF1022	
400PTH6	Top hat, 6 in	PSF1023	
400PHH	Half hat	PSF1027	
400WB	Weighted base	PSF1032	
400XBTH	Cross baffle top hat	PSF1031	
400L	Egg crate louver	PSF1028	
400BD	Barn door, 4-leaf with extension ring, 190 mm (7.5 in), black (for use in inner accessory slot to reduce light leak)	PSF1019	
400BDS	Barn door, 4-leaf with short extension ring, 190 mm (7.5 in), black	PSF1095*	
FRESBD7.5	Studio barn door, 8-leaf, 190 mm (7.5 in), black	PSF1191	
BDS	Studio barn door, 4-leaf, 190 mm (7.5 in), black	PSF1101	

*Use of the barn door will reduce beam angle in wide settings.

Multiverse

MODEL	DESCRIPTION	PART NUMBER	
CT-5900	City Theatrical Multiverse SHoW Baby	4360A1091	
CT-5902	City Theatrical Multiverse Node 900 MHz / 2.4 GHz	4360A1092	
CT-5903	City Theatrical Multiverse Node 2.4 GHz	4360A1093	
CT-5910	City Theatrical Multiverse Transmitter 900 MHz / 2.4 GHz	4360A1094	
CT-5911	City Theatrical Multiverse Transmitter 2.4 GHz	4360A1095	
CT-7400	City Theatrical Multiverse Vero Transmitter 900 MHz/2.4 GHz (outdoor)	4360A1097	

Power Input Cables

Use information below to order 1.5 m (5 ft) power input leads with factory-fitted connectors. All ETL fixtures ship with Seetronic X Series IP65 to pass-thru power cable (7427B7030). All CE fixtures ship with Seetronic X Series IP65 to bare-end power cable (7427B7035).

MODEL	DESCRIPTION	PART NUMBER (NOT CE)	
T1PA-A	1.5 m (5 ft) Edison plug to TRUE1 receptacle, UL 1573, black	2500B7029-A	
T1PA-B	1.5 m (5 ft) Stage Pin plug to TRUE1 receptacle, UL 1573, black	2500B7029-B	
T1PA-C	1.5 m (5 ft) Twist Lock plug to TRUE1 receptacle, UL 1573, black	2500B7029-C	
T1PA-X	1.5 m (5 ft) Bare end pigtail to TRUE1 receptacle, UL 1573, black	2500B7029-X	

Power Thru Jumpers

Note: Power thru jumpers connect to a fixture's output (thru) connector to provide a link to successive fixtures.

MODEL	DESCRIPTION	PART NUMBER (NOT CE)	
T1PJ-5	1.5 m (5 ft) TRUE1 plug to TRUE1 receptacle fixture power jumper, UL rated, black	2500B7030	
T1PJ-10	3 m (10 ft) TRUE1 plug to TRUE1 receptacle fixture power jumper, UL rated, black	2500B7031	
DPT1A-5	1.5 m (5 ft) powerCON plug (gray) to TRUE1 receptacle adapter cable, black	2500B7038	
T1DPA-5	1.5 m (5 ft) TRUE1 plug to powerCON receptacle (blue) adapter cable, black	2500B7039	

PHYSICAL


ColorSource Fresnel VXT MAX Dimensions

Model	Height		Width		Depth	
	mm	in	mm	in	mm	in
Fresnel VXT MAX	353	13.89	344	13.54	295	11.60

ColorSource Fresnel VXT MAX Weights

Model	Weight		Shipping Weight	
	kg	lb	kg	lb
Fresnel VXT MAX	7.89	17.4	10	22.1

COLORSOURCE FRESNEL VXT MAX

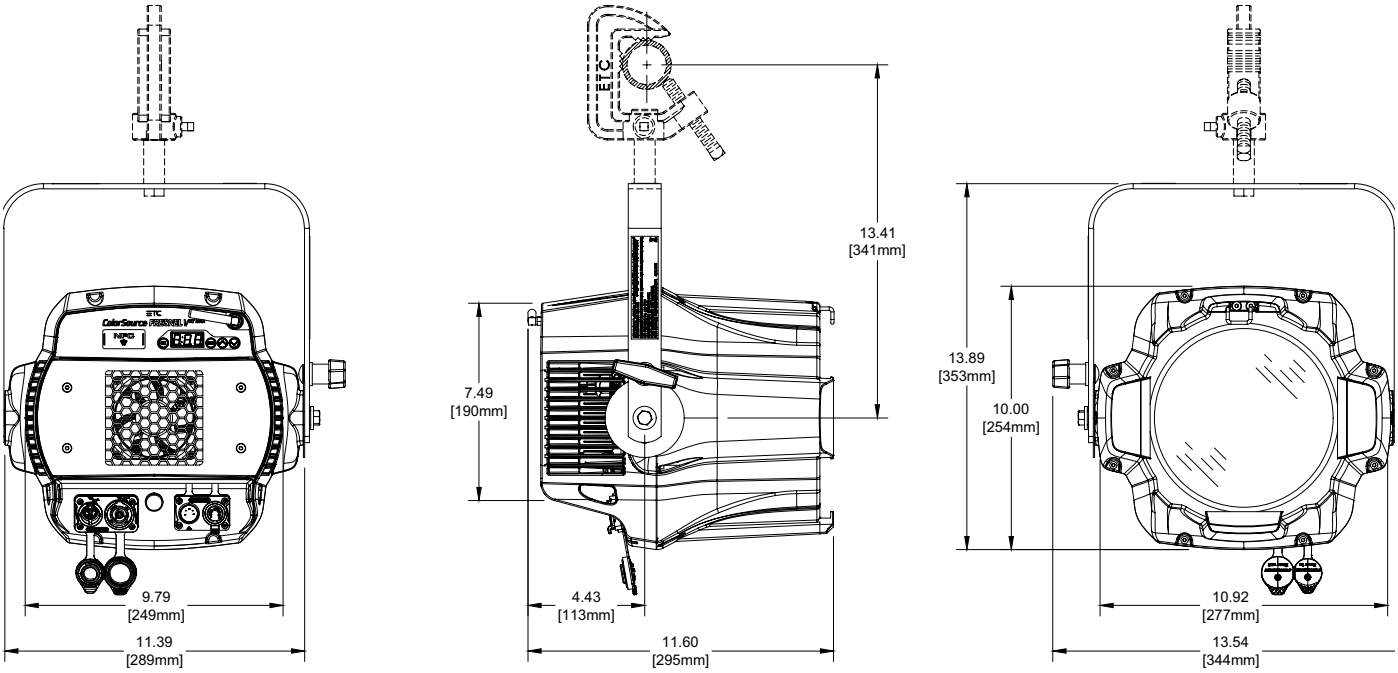

Corporate Headquarters ▪ Middleton, WI USA
Global Offices ▪ London, UK ▪ Rome, IT ▪ Holzkirchen, DE ▪ Paris, FR ▪ Hong Kong ▪ Dubai, UAE
New York, NY ▪ Orlando, FL ▪ Los Angeles, CA ▪ Austin, TX ▪ Squamish, BC ▪ Victor, NY
©2026 ETC. All Rights Reserved. All product information and specifications subject to change. Rev A 2026-11
*Trademark and patent info: etcconnect.com/IP ▪ Third-party license agreement info: etcconnect.com/licenses

etcconnect.com